REV: A First Issue

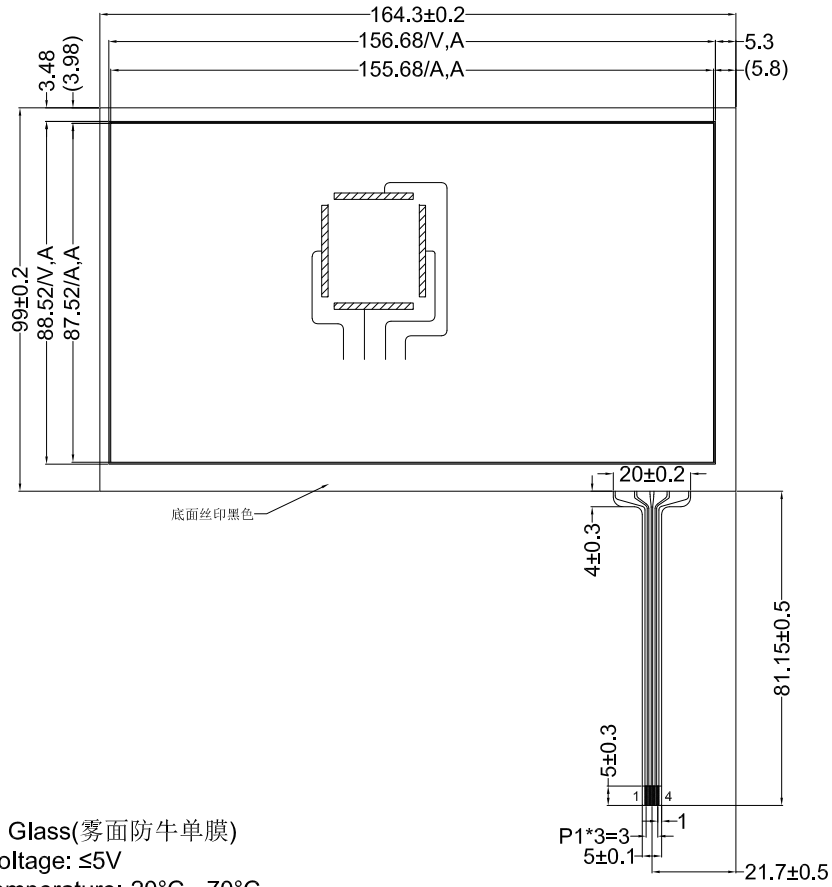

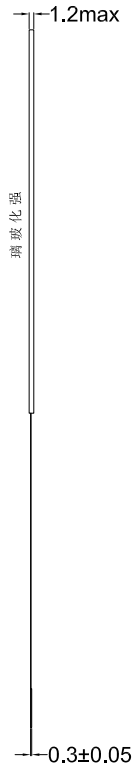

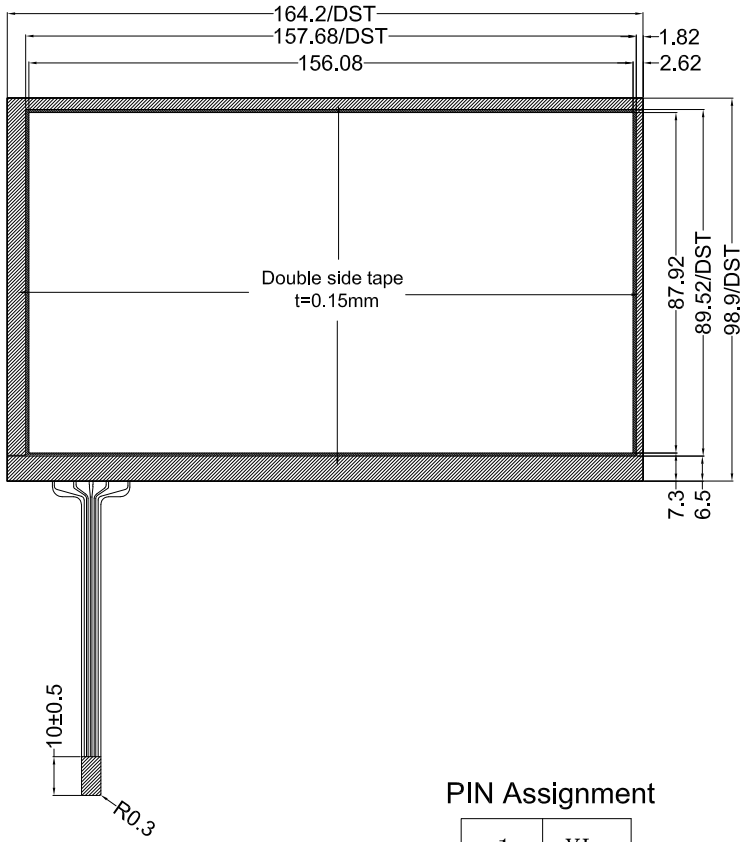

Notes:

1. Type:Film to Glass(雾面防牛单膜)
2. Operating Voltage: ≤5V
3. operation Temperature:-20°C~-70°C
   Storage Temperature:-30°C~-80°C
4. Life Time: Dotting test≥1,000,000 times
   Lineation test≥50,000 times
5. Connect Material:FPC By Golden plated
6. Response Time:≤15ms
7. Linearity:≤3%
8. Transmittance:≥78%
9. Surface Hardness≥3H(Pencil)
10. operation force:≤30-100g
11. Resistance:
    (Anti-glare Hard&Matte anti-niuton Coating ITO Flim)Y:50Ω～400Ω
    (Stand ard ITOGlass) X:350Ω～1100Ω
12. Unspecified Tolerance:±0.20
13. ROHS must be complied

PIN Assignment

1.	XL
2.	YD
3.	XR
4.	YU

GLOBAL WISDOM DISPLAY

ROHS must be complied Unspecificated tolerlance is ±0.2mm

Part	NAME:	GW-RTP-7.0-800480-01	
VER: A	U: mm	S: 1:1	Date: 2018-4-02
APPROVED	CHECKED	DRAWN	