


- Notes:
1. Type:Film to Glass(雾面防牛单膜)/4.3INCH
 2. Operating Voltage: 55V
 3. operation Temperature:-20°C~-70°C
Storage Temperature:-30°C~-80°C
 4. Life Time: Dotting testz 1,000,000 times
Lineation testz100,000 times
 5. Connect Material:FPC By Golden plated
 6. Response Time:≤10ms
 7. Linearity:≤1.5%
 8. Transmittance:≥78%
 9. Surface Hardness≥3H(Pencil)
 - 10.operation force:≤30-100g
 - 11.Resistance:

(Clear Hard & Mate anti-newton
ring coating ITO Film)X:400-1300 Ω (Stand ard
ITOGlass)Y:100-540 Ω
12.Unspecified Tolerance:±0.20
13.ROHS must be compiled

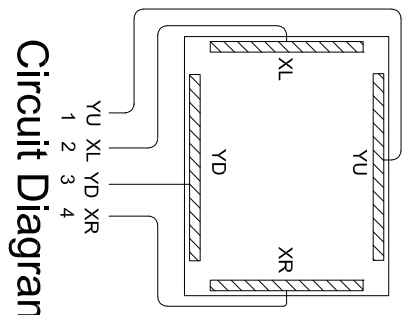

Circuit Diagram

PIN	SYMBOL
1	YU
2	XL
3	YD
4	XR



Part	NAME:	GW-RTP-4.3-480272-01
VER: A	U: mm	S: 1:1 Date: 2018-4-02
APPROVED	CHECKED	DRAWN

RoHS must be compiled Unspecified tolerance is ±0.2mm